

CALL NO. 300

CONTRACT ID. 142904

OLDHAM COUNTY

FED/STATE PROJECT NUMBER CB06 093 1694 B00025N

DESCRIPTION BRIDGE OVER HARRODS CREEK (MP 4.987)

WORK TYPE BRIDGE DECK RESTORATION & WATERPROOFING

PRIMARY COMPLETION DATE 11/15/2014

LETTING DATE: March 28,2014

Sealed Bids will be received electronically through the Bid Express bidding service until 10:00 AM EASTERN DAYLIGHT TIME March 28,2014. Bids will be publicly announced at 10:00 AM EASTERN DAYLIGHT TIME.

NO PLANS ASSOCIATED WITH THIS PROJECT.

REQUIRED BID PROPOSAL GUARANTY: Not less than 5% of the total bid.

TABLE OF CONTENTS

PART I SCOPE OF WORK

- PROJECT(S), COMPLETION DATE(S), & LIQUIDATED DAMAGES
- CONTRACT NOTES
- STATE CONTRACT NOTES
- SPECIAL NOTE(S) APPLICABLE TO PROJECT
- LIQUIDATED DAMAGES
- TRAFFIC CONTROL PLAN
- SKETCH MAP(S)

PART II SPECIFICATIONS AND STANDARD DRAWINGS

- SPECIFICATIONS REFERENCE
- SUPPLEMENTAL SPECIFICATION
- STANDARD DRAWINGS THAT APPLY

PART III EMPLOYMENT, WAGE AND RECORD REQUIREMENTS

- LABOR AND WAGE REQUIREMENTS
- EXECUTIVE BRANCH CODE OF ETHICS
- KENTUCKY EQUAL EMPLOYMENT OPPORTUNITY ACT OF 1978 LOCALITY 1,2,3,4 / STATE (UNDER 250,000)
- PROJECT WAGE RATES LOCALITY 1,2,3,4 / STATE

PART IV INSURANCE

PART V BID ITEMS

PART I SCOPE OF WORK

ADMINISTRATIVE DISTRICT - 05

CONTRACT ID - 142904 CB06 093 1694 B00025N COUNTY - OLDHAM

PCN - MB09316941401 CB06 093 1694 004-006

GUM STREET (KY 1694) (MP 4.938) FROM 0.090 MILE NORTH OF KY 329, EXTENDING NORTH 0.098 MILE (MP 5.036), A DISTANCE OF 0.10 MILES.BRIDGE DECK RESTORATION & WATERPROOFING GEOGRAPHIC COORDINATES LATITUDE 38:23:15.49 LONGITUDE 85:31:27.20

COMPLETION DATE(S):

COMPLETED BY 11/15/2014 APPLIES TO ENTIRE CONTRACT 30 CALENDAR DAYS APPLIES TO 093B00025N

CONTRACT NOTES

PROPOSAL ADDENDA

All addenda to this proposal must be applied when calculating bid and certified in the bid packet submitted to the Kentucky Department of Highways. Failure to use the correct and most recent addenda may result in the bid being rejected.

BID SUBMITTAL

Bidder must use the Department's Expedite Bidding Program available on the Internet web site of the Department of Highways, Division of Construction Procurement. (www.transportation.ky.gov/construction-procurement)

The Bidder must download the bid file located on the Bid Express website (www.bidx.com) to prepare a bid packet for submission to the Department. The bidder must submit electronically using Bid Express.

JOINT VENTURE BIDDING

Joint venture bidding is permissible. All companies in the joint venture must be prequalified in one of the work types in the Qualifications for Bidders for the project. The bidders must get a vendor ID for the joint venture from the Division of Construction Procurement and register the joint venture as a bidder on the project. Also, the joint venture must obtain a digital ID from Bid Express to submit a bid. A joint bid bond of 5% may be submitted for both companies or each company may submit a separate bond of 5%.

UNDERGROUND FACILITY DAMAGE PROTECTION

The contractor is advised that the Underground Facility Damage Protection Act of 1994, became law January 1, 1995. It is the contractor's responsibility to determine the impact of the act regarding this project, and take all steps necessary to be in compliance with the provision of the act.

SPECIAL NOTE FOR PIPE INSPECTION

Contrary to Section 701.03.08 of the 2012 Standard Specifications for Road and Bridge Construction and Kentucky Method 64-114, certification by the Kentucky Transportation Center for prequalified Contractors to perform laser/video inspection is not required on this contract. It will continue to be a requirement for the Contractor performing any laser/video pipe inspection to be prequalified for this specialized item with the Kentucky Transportation Cabinet-Division of Construction Procurement.

<u>REGISTRATION WITH THE SECRETARY OF STATE BY A FOREIGN</u> <u>ENTITY</u>

Pursuant to KRS 176.085(1)(b), an agency, department, office, or political subdivision of the Commonwealth of Kentucky shall not award a state contract to a person that is a foreign entity required by KRS 14A.9-010 to obtain a certificate of authority to transact business in the Commonwealth ("certificate") from the Secretary of State under KRS 14A.9-030 unless the person produces the certificate within fourteen (14) days of the bid or proposal opening. If the foreign entity is not required to obtain a certificate as provided in KRS 14A.9-010, the foreign entity should identify the applicable exception. Foreign entity is defined within KRS 14A.1-070.

For all foreign entities required to obtain a certificate of authority to transact business in the Commonwealth, if a copy of the certificate is not received by the contracting agency within the time frame identified above, the foreign entity's solicitation response shall be deemed non-responsive or the awarded contract shall be cancelled.

Businesses can register with the Secretary of State at https://secure.kentucky.gov/sos/ftbr/welcome.aspx.

SPECIAL NOTE FOR PROJECT QUESTIONS DURING ADVERTISEMENT

Questions about projects during the advertisement should be submitted in writing to the Division of Construction Procurement. This may be done by fax (502) 564-7299 or email to kytc.projectquestions@ky.gov. The Department will attempt to answer all submitted questions. The Department reserves the right not to answer if the question is not pertinent or does not aid in clarifying the project intent.

The deadline for posting answers will be 3:00 pm Eastern Daylight Time, the day preceding the Letting. Questions may be submitted until this deadline with the understanding that the later a question is submitted, the less likely an answer will be able to be provided.

The questions and answers will be posted for each Letting under the heading "Questions & Answers" on the Construction Procurement website (www.transportation.ky.gov/contract). The answers provided shall be considered part of this Special Note and, in case of a discrepancy, will govern over all other bidding documents.

HARDWOOD REMOVAL RESTRICTIONS

The Kentucky Division of Forestry has imposed a quarantine in Anderson, Boone, Bourbon, Boyd, Boyle, Bracken, Campbell, Carroll, Fayette, Franklin, Gallatin, Garrard,

Grant, Greenup, Hardin, Harrison, Henry, Jefferson, Jessamine, Kenton, Oldham, Owen, Pendleton, Scott, Shelby, Trimble, and Woodford Counties to prevent the spread of an invasive insect, the emerald ash borer. Hardwood cut in conjunction with the project may not be removed from the county of its origin. Chipping or burning on site is the preferred method of disposal.

INSTRUCTIONS FOR EXCESS MATERIAL SITES AND BORROW SITES

Identification of excess material sites and borrow sites shall be the responsibility of the Contractor. The Contractor shall be responsible for compliance with all applicable state and federal laws and may wish to consult with the US Fish and Wildlife Service to seek protection under Section 10 of the Endangered Species Act for these activities.

ACCESS TO RECORDS

The contractor, as defined in KRS 45A.030 (9) agrees that the contracting agency, the Finance and Administration Cabinet, the Auditor of Public Accounts, and the Legislative Research Commission, or their duly authorized representatives, shall have access to any books, documents, papers, records, or other evidence, which are directly pertinent to this contract for the purpose of financial audit or program review. Records and other prequalification information confidentially disclosed as part of the bid process shall not be deemed as directly pertinent to the contract and shall be exempt from disclosure as provided in KRS 61.878(1)(c). The contractor also recognizes that any books, documents, papers, records, or other evidence, received during a financial audit or program review shall be subject to the Kentucky Open Records Act, KRS 61.870 to 61.884.

In the event of a dispute between the contractor and the contracting agency, Attorney General, or the Auditor of Public Accounts over documents that are eligible for production and review, the Finance and Administration Cabinet shall review the dispute and issue a determination, in accordance with Secretary's Order 11-004. (See attachment)

10/29/12

Steven L. Beshear Governor Lori H. Flanery Secretary

Room 383, Capitol Annex 702 Capital Avenue Frankfort, KY 40601-3462 (502) 564-4240 Fax (502) 564-6785

OFFICE OF THE SECRETARY

SECRETARY'S ORDER 11-004

FINANCE AND ADMINISTRATION CABINET

Vendor Document Disclosure

WHEREAS, in order to promote accountability and transparency in governmental operations, the Finance and Administration Cabinet believes that a mechanism should be created which would provide for review and assistance to an Executive Branch agency if said agency cannot obtain access to documents that it deems necessary to conduct a review of the records of a private vendor that holds a contract to provide goods and/or services to the Commonwealth; and

WHEREAS, in order to promote accountability and transparency in governmental operations, the Finance and Administration Cabinet believes that a mechanism should be created which would provide for review and assistance to an Executive Branch agency if said agency cannot obtain access to documents that it deems necessary during the course of an audit, investigation or any other inquiry by an Executive Branch agency that involves the review of documents; and

WHEREAS, KRS 42.014 and KRS 12.270 authorizes the Secretary of the Finance and Administration Cabinet to establish the internal organization and assignment of functions which are not established by statute relating to the Finance and Administration Cabinet; further, KRS Chapter 45A.050 and 45A.230 authorizes the Secretary of the Finance and Administration Cabinet to procure, manage and control all supplies and services that are procured by the Commonwealth and to intervene in controversies among vendors and state agencies; and

NOW, THEREFORE, pursuant to the authority vested in me by KRS 42.014, KRS 12.270, KRS 45A.050, and 45A.230, I, Lori H. Flanery, Secretary of the Finance and Administration Cabinet, do hereby order and direct the following:

- I. Upon the request of an Executive Branch agency, the Finance and Administration Cabinet ("FAC") shall formally review any dispute arising where the agency has requested documents from a private vendor that holds a state contract and the vendor has refused access to said documents under a claim that said documents are not directly pertinent or relevant to the agency's inquiry upon which the document request was predicated.
- II. Upon the request of an Executive Branch agency, the FAC shall formally review any situation where the agency has requested documents that the agency deems necessary to



- conduct audits, investigations or any other formal inquiry where a dispute has arisen as to what documents are necessary to conclude the inquiry.
- III. Upon receipt of a request by a state agency pursuant to Sections I & II, the FAC shall consider the request from the Executive Branch agency and the position of the vendor or party opposing the disclosure of the documents, applying any and all relevant law to the facts and circumstances of the matter in controversy. After FAC's review is complete, FAC shall issue a Determination which sets out FAC's position as to what documents and/or records, if any, should be disclosed to the requesting agency. The Determination shall be issued within 30 days of receipt of the request from the agency. This time period may be extended for good cause.
- IV. If the Determination concludes that documents are being wrongfully withheld by the private vendor or other party opposing the disclosure from the state agency, the private vendor shall immediately comply with the FAC's Determination. Should the private vendor or other party refuse to comply with FAC's Determination, then the FAC, in concert with the requesting agency, shall effectuate any and all options that it possesses to obtain the documents in question, including, but not limited to, jointly initiating an action in the appropriate court for relief.
- V. Any provisions of any prior Order that conflicts with the provisions of this Order shall be deemed null and void.

SPECIAL NOTE FOR RECIPROCAL PREFERENCE

Reciprocal preference to be given by public agencies to resident bidders

By reference, KRS 45A.490 to 45A.494 are incorporated herein and in compliance regarding the bidders residency. Bidders who want to claim resident bidder status should complete the Affidavit for Claiming Resident Bidder Status along with their bid in the Expedite Bidding Program. Submittal of the Affidavit should be done along with the bid in Bid Express.

SPECIAL NOTE FOR BRIDGE DECK WATERPROOFING MEMBRANE AND ASPHALT OVERLAY ON BRIDGES

I. DESCRIPTION

Perform all work in accordance with the Department's 2012 Standard Specifications, applicable Special Provisions, and Standard Drawings, except as hereafter specified. Article references are to the Standard Specifications. Furnish all materials, labor, equipment, tools, and incidentals necessary to complete the One Step Bridge Deck Waterproofing Membrane.

II. MATERIALS

- A. Bridge Deck Waterproofing Membrane. See Section 808.05.
- **B. Surface Primer**. Use surface primer material recommended by the manufacturer.
- **C. Asphalt Overlay.** Mill each approach to allow consistent 1 ½" asphalt course from each bridge end to a point 150' off each end of bridge and tie into existing roadway with an edge key. Edge Key shall be incidental and shall not be a pay item. Pave the bridge with the same type and thickness of asphalt that is being placed on the adjacent roadway.

III. CONSTRUCTION METHODS

- **A. Surface Preparation.** Thoroughly clean the entire surface area of the bridge deck prior to paving. Clean by either air blasting or water blasting. If water blasting is used, thoroughly dry area prior to placing the primer and membrane.
- **B. Prime Coating.** Apply material to the bridge deck according to the Manufacturer's recommendations.
- **C. One Step Membrane.** Apply the membrane to the entire surface of the bridge deck. Overlap the membrane a minimum of 1 foot onto the adjacent roadway approaches. Extend the membrane up the face of the curbs a minimum of 1½ inches. Overlap membrane as necessary to achieve 100% coverage of the bridge deck. Install as recommended by the manufacturer, straight and wrinkle free, with no curled or uplifted edges.
- **D.** Pave Bridge with Asphalt Surface. Pave the bridge with asphalt overlay immediately after the one step membrane is in place.

IV. METHOD OF MEASUREMENT

A. One Step Membrane. The Department will measure this item in square yards. The one step membrane area (A) will be calculated from the (L) length of the bridge plus 1 foot on

Contract ID: 142904 Page 12 of 48

each approach multiplied by the (W) width of the bridge curb to curb. $A=((L+2) \times W)/9$. This calculated area will be the area measured for payment; laps, cutoffs and waste will not be measured for payment.

V. METHOD OF PAYMENT

A. One Step Membrane. Payment at the contract unit price per square yard shall be full compensation for all labor, equipment, materials and incidentals for surface preparation and furnishing and installing the surface primer and the one step membrane according to the Manufacturer's recommendations and these notes.

 $1\text{-}3108\ note one step membrane contractor} \\ 04/16/007$

SPECIAL NOTE FOR CONTRACT COMPLETION DATE AND LIQUIDATED DAMAGES ON BRIDGE REPAIR CONTRACTS

I. COMPLETION DATE. The Contractor has the option of selecting the starting date for this Contract. Once selected, notify the Department in writing of the date selected at least two weeks prior to beginning work. All work is to be completed by November 15, 2014. An allotted number of Calendar days are assigned to each structure in this contract as shown below.

STRUCTURE NO. OF CALENDAR DAYS COMPLETION DATE

093B00025N 30 November 15, 2014

Contrary to Section 108.07.02, the Engineer will begin charging calendar days for a structure on the day the Contractor starts work or sets up traffic control on that particular structure.

II. LIQUIDATED DAMAGES. Liquidated damages will be assessed the Contractor in accordance with the Transportation Cabinet, Department of Highway's 2012 Standard Specifications for Road and Bridge Construction, Section 108.09, when either the allotted number of calendar days or the November 15, 2014 date is exceeded.

Contrary to the Standard Specifications, liquidated damages will be assessed the Contractor during the months of December, January, February and March when the contract time has expired on any individual bridge or bridges. Contract time will be charged during these months.

All construction must be completed in accordance with the weather limitations specified in Section 606 and/or Section 601 as applicable. No extension of Contract time will be granted due to inclement weather or temperature limitations that occur due to starting work on the Contract or a structure late in the construction season.

TRAFFIC CONTROL PLAN

CB06-093-1694-004-006

TRAFFIC CONTROL GENERAL

Except as provided herein, traffic shall be maintained in accordance with the 2012 Standard Specifications and the Standard Drawings, current editions. Except for the roadway and traffic control bid items listed, all items of work necessary to maintain and control traffic will be paid at the lump sum bid price to "Maintain and Control Traffic".

Contrary to Section 106.01, traffic control devices used on this project may be new, or used in like new condition, at the beginning of the work and maintained in like new condition until completion of the work.

PROJECT PHASING & CONSTRUCTION PROCEDURES

At the discretion of the Engineer, days and hours may be specified when road closures will not be allowed.

Road may be closed to through traffic during construction; local traffic shall be maintained (See Standard drawing TTC-105). If traffic should be stopped due to construction operations, and a school bus on an official run arrives on the scene, the Contractor shall make provisions for the passage of the bus as quickly as possible.

LANE CLOSURES

Do not leave road closures in place during non-working hours.

SIGNS

Contrary to Section 112.04.02 and 112.04.03, Low Shoulder signs will not be measured for payment, but will be incidental to Maintain and Control Traffic. Contrary to section 112.04.02, only long term signs (signs intended to be continuously in place for more than 3 days) will be measured for payment; short term signs (signs intended to be left in place for 3 days or less) will not be measured for payment but will be incidental to Maintain and Control Traffic.

BARRICADES

Barricades used in lieu of barrels and cones for channelization or delineation will be incidental to Maintain and Control Traffic according to Section 112.04.01. Barricades used to protect pavement

OLDHAM COUNTY CB06 093 1694 B00025N Contract ID: 142904 Page 15 of 48

removal areas will be bid as each according to Section 112.04.05.

PAVEMENT EDGE DROP-OFFS


A pavement edge between opposing directions of traffic or lanes that traffic is expected to cross in a lane change situation shall not have an elevation difference greater than 1½". Warning signs (MUTCD W8-9 or W8-9A, or W8-11) shall be placed in advance of and at 1500 feet intervals throughout the drop-off area. Dual posting on both sides of the traveled way shall be required. All transverse transitions between newly surfaced pavement and the existing pavement areas that traffic may cross shall be wedged with asphalt mixture for leveling and wedging. Remove wedges prior to placement of the final surface course.

Pavement edges that traffic is not expected to cross, except accidentally, shall be treated as follows:

Less than 2" - No protection required.


2" to 4" - Place plastic drums, vertical panels, or barricades every 50 feet. Cones may be used in place of plastic drums, panels, and barricades during daylight working hours. Wedge with asphalt mixture for leveling and wedging with a 1:1 or flatter slope in daylight hours, or 3:1 or flatter slope during nighttime hours, when work is not active in the drop-off area.

tcp2laneroadclosed 09/15/03



OLDHAM COUNTY

BRIDGE 093B00025N KY 1694 (MP 4.987) OVER HARRODS CREEK LatDD= 38.3876, LonDD= -85.5242

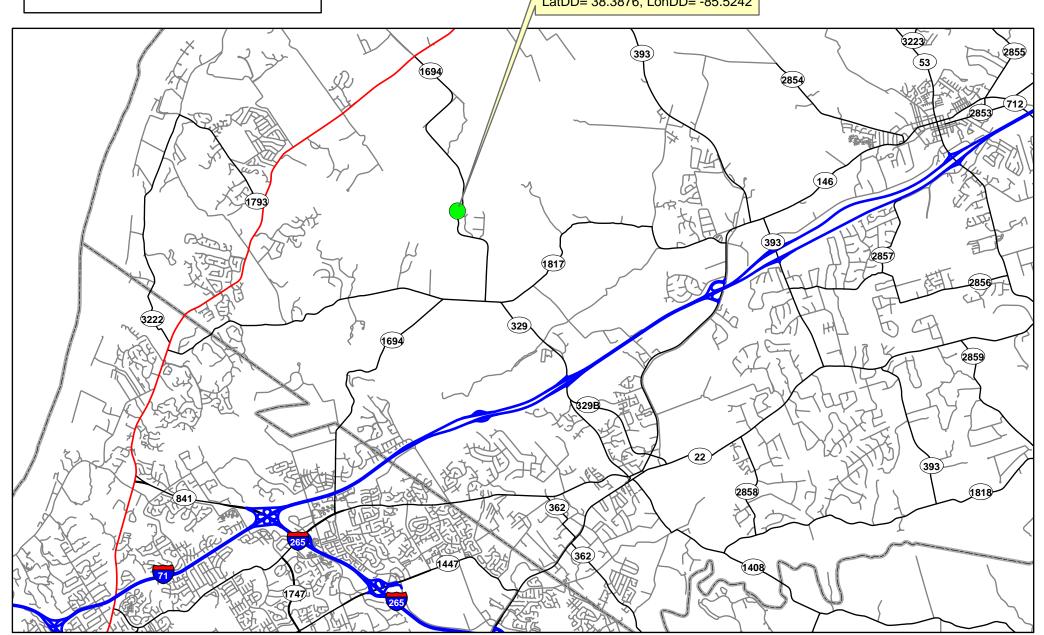

PART II SPECIFICATIONS AND STANDARD DRAWINGS

SPECIFICATIONS REFERENCE

Any reference in the plans or proposal to previous editions of the *Standard Specifications* for Road and Bridge Construction and Standard Drawings are superseded by Standard Specifications for Road and Bridge Construction, Edition of 2012 and Standard Drawings, Edition of 2012 with the 2012 Revision.

Contract ID: 142904 Page 19 of 48

Subsection:	108.03 Preconstruction Conference.
Revision:	Replace 8) Staking with the following:
	8) Staking (designated by a Professional Engineer or Land Surveyor licensed in the
	Commonwealth of Kentucky.
Subsection:	109.07.02 Fuel.
Revision:	Revise item Crushed Aggregate Used for Embankment Stabilization to the following:
	Crushed Aggregate
	Used for Stabilization of Unsuitable Materials
	Used for Embankment Stabilization
Subsection:	110.02 Demobilization.
Revision:	Replace the first part of the first sentence of the second paragraph with the following:
	Perform all work and operations necessary to accomplish final clean-up as specified in the first
	paragraph of Subsection 105.12;
Subsection:	112.03.12 Project Traffic Coordinator (PTC).
Revision:	Replace the last paragraph of this subsection with the following:
Revision.	Ensure the designated PTC has sufficient skill and experience to properly perform the task
	assigned and has successfully completed the qualification courses.
Subsection:	112.04.18 Diversions (By-Pass Detours).
Revision:	Insert the following sentence after the 2nd sentence of this subsection.
Kevision.	l ~
	The Department will not measure temporary drainage structures for payment when the contract
	documents provide the required drainage opening that must be maintained with the diversion.
	The temporary drainage structures shall be incidental to the construction of the diversion. If the
	contract documents fail to provide the required drainage opening needed for the diversion, the
	cost of the temporary drainage structure will be handled as extra work in accordance with
	section 109.04.
Subsection:	201.03.01 Contractor Staking.
Revision:	Replace the first paragraph with the following: Perform all necessary surveying under the
	general supervision of a Professional Engineer or Land Surveyor licensed in the
	Commonwealth of Kentucky.
Subsection:	201.04.01 Contractor Staking.
Revision:	Replace the last sentence of the paragraph with the following: Complete the general layout of
	the project under the supervision of a Professional Engineer or Land Surveyor licensed in the
	Commonwealth of Kentucky.
Subsection:	206.04.01 Embankment-in-Place.
Revision:	Replace the fourth paragraph with the following: The Department will not measure suitable
	excavation included in the original plans that is disposed of for payment and will consider it
	incidental to Embankment-in-Place.
Subsection:	208.02.01 Cement.
Revision:	Replace paragraph with the following:
	Select Type I or Type II cement conforming to Section 801. Use the same type cement
	throughout the work.
<u> </u>	1

Contract ID: 142904 Page 20 of 48

Revision: R	
	Replace the fourth paragraph with the following:
D	Do not allow traffic or equipment on the finished surface until the stabilized subgrade has cured
fc	for a total of 7-days with an ambient air temperature above 40 degrees Fahrenheit. A curing day
CO	consists of a continuous 24-hour period in which the ambient air temperature does not fall below
40	0 degrees Fahrenheit. Curing days will not be calculated consecutively, but must total seven (7)
,,,	24-hour days with the ambient air temperature remaining at or above 40 degrees Fahrenheit
b	before traffic or equipment will be allowed to traverse the stabilized subgrade. The Department
m	nay allow a shortened curing period when the Contractor requests. The Contractor shall give the
D	Department at least 3 day notice of the request for a shortened curing period. The Department
w	vill require a minimum of 3 curing days after final compaction. The Contractor shall furnish
CO	cores to the treated depth of the roadbed at 500 feet intervals for each lane when a shortened
CI	curing time is requested. The Department will test cores using an unconfined compression test.
R	Roadbed cores must achieve a minimum strength requirement of 80 psi.
Subsection: 20	208.03.06 Curing and Protection.
Revision: R	Replace paragraph nine with the following:
A	At no expense to the Department, repair any damage to the subgrade caused by freezing.
Subsection: 2	212.03.03 Permanent Seeding and Protection.
Part: A	A) Seed Mixtures for Permanent Seeding.
Revision: R	Revise Seed Mix Type I to the mixture shown below:
50	50% Kentucky 31 Tall Fescue (Festuca arundinacea)
3:	35% Hard Fescue (Festuca (Festuca longifolia)
10	0% Ryegrass, Perennial (Lolium perenne)
5	5% White Dutch Clover (Trifolium repens)
	212.03.03 Permanent Seeding and Protection.
Part: A	A) Seed Mixtures for Permanent Seeding.
Number: 2	
Revision: R	Replace the paragraph with the following:
P	Permanent Seeding on Slopes Greater than 3:1 in Highway Districts 4, 5, 6, and 7. Apply seed
	nix Type II at a minimum application rate of 100 pounds per acre. If adjacent to a golf course
	eplace the crown vetch with Kentucky 31 Tall Fescue.
Subsection: 2	212.03.03 Permanent Seeding and Protection.
Part: A	A) Seed Mixtures for Permanent Seeding.
Number: 3	
	Replace the paragraph with the following:
	Permanent Seeding on Slopes Greater than 3:1 in Highway Districts 1, 2, 3, 8, 9, 10, 11, and 12.
	Apply seed mix Type III at a minimum application rate of 100 pounds per acre. If adjacent to
C1	erop land or golf course, replace the Sericea Lespedeza with Kentucky 31 Fescue.
Subsection: 2	212.03.03 Permanent Seeding and Protection.
Part: B	B) Procedures for Permanent Seeding.
Revision: D	Delete the first sentence of the section.

Contract ID: 142904 Page 21 of 48

Subsection:	212.03.03 Permanent Seeding and Protection.							
	B) Procedures for Permanent Seeding.							
	Replace the second and third sentence of the section with the following:							
	Prepare a seedbed and apply an initial fertilizer that contains a minimum of 100 pounds of							
	nitrogen, 100 pounds of phosphate, and 100 pounds of potash per acre. Apply agricultural							
	limestone to the seedbed when the Engineer determines it is needed. When required, place							
	agricultural limestone at a rate of 3 tons per acre.							
	212.03.03 Permanent Seeding and Protection.							
	D) Top Dressing.							
	Change the title of part to D) Fertilizer.							
	212.03.03 Permanent Seeding and Protection.							
	D) Fertilizer.							
	Replace the first paragraph with the following:							
	Apply fertilizer at the beginning of the seeding operation and after vegetation is established. Use							
	fertilizer delivered to the project in bags or bulk. Apply initial fertilizer to all areas prior to the							
	seeding or sodding operation at the application rate specified in 212.03.03 B). Apply 20-10-10							
	fertilizer to the areas after vegetation has been established at a rate of 11.5 pounds per 1,000							
	square feet. Obtain approval from the Engineer prior to the 2nd fertilizer application. Reapply							
	fertilizer to any area that has a streaked appearance. The reapplication shall be at no additional							
	cost to the Department. Re-establish any vegetation severely damaged or destroyed because of							
	an excessive application of fertilizer at no cost to the Department.							
	an encessive approaction of fertilizer at no cost to the Department.							
Subsection:	212.03.03 Permanent Seeding and Protection.							
	D) Fertilizer.							
	Delete the second paragraph.							
	212.04.04 Agricultural Limestone.							
	Replace the entire section with the following:							
	The Department will measure the quantity of agricultural limestone in tons.							
	212.04.05 Fertilizer.							
Revision:	Replace the entire section with the following:							
	The Department will measure fertilizer used in the seeding or sodding operations for payment.							
	The Department will measure the quantity by tons.							
Subsection:	212.05 PAYMENT.							
Revision:	Delete the following item code:							
	Code Pay Item Pay Unit							
	05966 Topdressing Fertilizer Ton							
Subsection:	212.05 PAYMENT.							
Revision:	Add the following pay items:							
	Code Pay Item Pay Unit							
	·							
	05963 Initial Fertilizer Ton							
	05963 Initial Fertilizer Ton 05964 20-10-10 Fertilizer Ton							
Subsection: Revision:	212.05 PAYMENT. Add the following pay items:							

Contract ID: 142904 Page 22 of 48

	-					
Subsection:	213.03.02 Progress Requirements.					
Revision:	Replace the last sentence of the third paragraph with the following:					
	Additionally, the Department will apply a penalty equal to the liquidated damages when all					
	aspects of the work are not coordinated in an acceptable manner within 7 calendar days after					
	written notification.					
Subsection:	213.03.05 Temporary Control Measures.					
Part:	E) Temporary Seeding and Protection.					
Revision:	Delete the second sentence of the first paragraph.					
Subsection:	304.02.01 Physical Properties.					
Table:	Required Geogrid Properties					
Revision:	Replace all references to Test Method "GRI-GG2-87" with ASTM D 7737.					
Subsection:	402.03.02 Contractor Quality Control and Department Acceptance.					
Part:	B) Sampling.					
Revision:	Replace the second sentence with the following:					
	The Department will determine when to obtain the quality control samples using the random-					
	number feature of the mix design submittal and approval spreadsheet. The Department will					
	randomly determine when to obtain the verification samples required in Subsections 402.03.03					
	and 402.03.04 using the Asphalt Mixture Sample Random Tonnage Generator.					
Subsection:	402.03.02 Contractor Quality Control and Department Acceptance.					
Part:	D) Testing Responsibilities.					
Number:	3) VMA.					
Revision:	Add the following paragraph below Number 3) VMA:					
	Retain the AV/VMA specimens and one additional corresponding G _{mm} sample for 5 working					
	days for mixture verification testing by the Department. For Specialty Mixtures, retain a					
	mixture sample for 5 working days for mixture verification testing by the Department. When					
	the Department's test results do not verify that the Contractor's quality control test results are					
	within the acceptable tolerances according to Subsection 402.03.03, retain the samples and					
	specimens from the affected sublot(s) for the duration of the project.					
	402.03.02 Contractor Quality Control and Department Acceptance.					
Part:	D) Testing Responsibilities.					
Number:	4) Density.					
Revision:	Replace the second sentence of the Option A paragraph with the following:					
	Perform coring by the end of the following work day.					
Subsection:	402.03.02 Contractor Quality Control and Department Acceptance.					
Part:	D) Testing Responsibilities.					
Number:	5) Gradation.					
Revision:	Delete the second paragraph.					
Subsection:	402.03.02 Contractor Quality Control and Department Acceptance.					
Part:	H) Unsatisfactory Work. 1) Based on Lab Data					
Number:	1) Based on Lab Data. Replace the second paragraph with the following:					
Revision:	Replace the second paragraph with the following:					
	When the Engineer determines that safety concerns or other considerations prohibit an					
	immediate shutdown, continue work and the Department will make an evaluation of					
L	acceptability according to Subsection 402.03.05.					

Contract ID: 142904 Page 23 of 48

Subsection:	402.03.03 Verification.
Revision:	Replace the first paragraph with the following:
	402.03.03 Mixture Verification. For volumetric properties, the Department will perform a
	minimum of one verification test for AC, AV, and VMA according to the corresponding
	procedures as given in Subsection 402.03.02. The Department will randomly determine when to
	obtain the verification sample using the Asphalt Mixture Sample Random Tonnage Generator.
	For specialty mixtures, the Department will perform one AC and one gradation determination
	per lot according to the corresponding procedures as given in Subsection 402.03.02. However,
	Department personnel will not perform AC determinations according to KM 64-405. The
	Contractor will obtain a quality control sample at the same time the Department obtains the
	mixture verification sample and perform testing according to the procedures given in Subsection
	402.03.02. If the Contractor's quality control sample is verified by the Department's test results
	within the tolerances provided below, the Contractor's sample will serve as the quality control
	sample for the affected sublot. The Department may perform the mixture verification test on the
	Contractor's equipment or on the Department's equipment.
Subsection:	402.03.03 Verification.
Part:	A) Evaluation of Sublot(s) Verified by Department.
Revision:	Replace the third sentence of the second paragraph with the following:
	When the paired t -test indicates that the Contractor's data and Department's data are possibly
	not from the same population, the Department will investigate the cause for the difference
	according to Subsection 402.03.05 and implement corrective measures as the Engineer deems
	appropriate.
Subsection:	402.03.03 Verification.
Part:	B) Evaluation of Sublots Not Verified by Department.
Revision:	Replace the third sentence of the first paragraph with the following:
	When differences between test results are not within the tolerances listed below, the Department
	will resolve the discrepancy according to Subsection 402.03.05.
Subsection:	402.03.03 Verification.
Part:	B) Evaluation of Sublots Not Verified by Department.
Revision:	Replace the third sentence of the second paragraph with the following:
	When the F -test or t -test indicates that the Contractor's data and Department's data are possibly
	not from the same population, the Department will investigate the cause for the difference
	according to Subsection 402.03.05 and implement corrective measures as the Engineer deems
	appropriate.
Subsection:	402.03.03 Verification.
Part:	C) Test Data Patterns.
Revision:	Replace the second sentence with the following:
	When patterns indicate substantial differences between the verified and non-verified sublots, the
	Department will perform further comparative testing according to subsection 402.03.05.

Contract ID: 142904 Page 24 of 48

402.03 CONSTRUCTION.
Add the following subsection: 402.03.04 Testing Equipment and Technician Verification. For mixtures with a minimum quantity of 20,000 tons and for every 20,000 tons thereafter, the Department will obtain an additional verification sample at random using the Asphalt Mixture Sample Random Tonnage Generator in order to verify the integrity of the Contractor's and Department's laboratory testing equipment and technicians. The Department will obtain a mixture sample of at least 150 lb at the asphalt mixing plant according to KM 64-425 and split it according to AASHTO R 47. The Department will retain one split portion of the sample and provide the other portion to the Contractor. At a later time convenient to both parties, the Department and Contractor will simultaneously reheat the sample to the specified compaction temperature and test the mixture for AV and VMA using separate laboratory equipment according to the corresponding procedures given in Subsection 402.03.02. The Department will evaluate the differences in test results between the two laboratories. When the difference between the results for AV or VMA is not within ± 2.0 percent, the Department will investigate and resolve the discrepancy according to Subsection 402.03.05.
402.03.04 Dispute Resolution.
Change the subsection number to 402.03.05.
402.05 PAYMENT.
Lot Pay Adjustment Schedule Compaction Option A Base and Binder Mixtures
AC
Replace the Deviation from JMF(%) that corresponds to a Pay Value of 0.95 to ±0.6.
403.02.10 Material Transfer Vehicle (MTV).
Replace the first sentence with the following:
In addition to the equipment specified above, provide a MTV with the following minimum
characteristics:
412.02.09 Material Transfer Vehicle (MTV).
Replace the paragraph with the following:
Provide and utilize a MTV with the minimum characteristics outlined in section 403.02.10.
412.03.07 Placement and Compaction.
Replace the first paragraph with the following:
Use a MTV when placing SMA mixture in the driving lanes. The MTV is not required on ramps
and/or shoulders unless specified in the contract. When the Engineer determines the use of the
MTV is not practical for a portion of the project, the Engineer may waive its requirement for
that portion of pavement by a letter documenting the waiver.
412.04 MEASUREMENT.
Add the following subsection:
412.04.03. Material Transfer Vehicle (MTV). The Department will not measure the MTV for
payment and will consider its use incidental to the asphalt mixture.

Contract ID: 142904 Page 25 of 48

Subsection:	501.03.19 Surface Tolerances and Testing Surface.				
Part:	B) Ride Quality.				
Revision:	Add the following to the end of the first paragraph:				
	The Department will specify if the ride quality requirements are Category A or Category B when				
	ride quality is specified in the Contract. Category B ride quality requirements shall apply when				
	the Department fails to classify which ride quality requirement will apply to the Contract.				
Subsection:	603.03.06 Cofferdams.				
Revision:	Replace the seventh sentence of paragraph one with the following:				
	Submit drawings that are stamped by a Professional Engineer licensed in the Commonwealth of				
	Kentucky.				
Subsection:	605.03.04 Tack Welding.				
Revision:	Insert the subsection and the following:				
	605.03.04 Tack Welding. The Department does not allow tack welding.				
Subsection:	606.03.17 Special Requirements for Latex Concrete Overlays.				
Part:	A) Existing Bridges and New Structures.				
Number:	1) Prewetting and Grout-Bond Coat.				
Revision:	Add the following sentence to the last paragraph: Do not apply a grout-bond coat on bridge				
	decks prepared by hydrodemolition.				
Subsection:	609.03 Construction.				
Revision:	Replace Subsection 609.03.01 with the following:				
	609.03.01 A) Swinging the Spans. Before placing concrete slabs on steel spans or precast				
	concrete release the temporary erection supports under the bridge and swing the span free on its				
	supports.				
	609.03.01 B) Lift Loops. Cut all lift loops flush with the top of the precast beam once the beam				
	is placed in the final location and prior to placing steel reinforcement. At locations where lift				
	loops are cut, paint the top of the beam with galvanized or epoxy paint.				
Subsection:	611.03.02 Precast Unit Construction.				
Revision:	Replace the first sentence of the subsection with the following:				
	Construct units according to ASTM C1577, replacing Table 1 (Design Requirements for				
	Precast Concrete Box Sections Under Earth, Dead and HL-93 Live Load Conditions) with				
	KY Table 1 (Precast Culvert KYHL-93 Design Table), and Section 605 with the following				
	exceptions and additions:				
Subsection:	613.03.01 Design.				
Number:	2)				
Revision:	Replace "AASHTO Standard Specifications for Highway Bridges" with "AASHTO LRFD				
	Bridge Design Specifications"				
Subsection:	615.06.02				
Revision:	Add the following sentence to the end of the subsection.				
	The ends of units shall be normal to walls and centerline except exposed edges shall be beveled				
	34 inch.				
Subsection:	615.06.03 Placement of Reinforcement in Precast 3-Sided Units.				
Revision:	Replace the reference of 6.6 in the section to 615.06.06.				

Contract ID: 142904 Page 26 of 48

Subsection:	615.06.04 Placement of Reinforcement for Precast Endwalls.						
Revision:	Replace the reference of 6.7 in the section to 615.06.07.						
Subsection:	615.06.06 Laps, Welds, and Spacing for Precast 3-Sided Units.						
Revision:	Replace the subsection with the following:						
	Tension splices in the circumferential reinforcement shall be made by lapping. Laps may not be						
	tack welded together for assembly purposes. For smooth welded wire fabric, the overlap shall						
	meet the requirements of AASHTO 2012 Bridge Design Guide Section 5.11.2.5.2 and						
	AASHTO 2012 Bridge Design Guide Section 5.11.6.3. For deformed welded wire fabric, the						
	overlap shall meet the requirements of AASHTO 2012 Bridge Design Guide Section 5.11.2.5.1						
	and AASHTO 2012 Bridge Design Guide Section 5.11.6.2. The overlap of welded wire fabric						
	shall be measured between the outer most longitudinal wires of each fabric sheet. For deformed						
	billet-steel bars, the overlap shall meet the requirements of AASHTO 2012 Bridge Design Guide						
	Section 5.11.2.1. For splices other than tension splices, the overlap shall be a minimum of 12"						
	for welded wire fabric or deformed billet-steel bars. The spacing center to center of the						
	circumferential wires in a wire fabric sheet shall be no less than 2 inches and no more than 4						
	inches. The spacing center to center of the longitudinal wires shall not be more than 8 inches.						
	The spacing center to center of the longitudinal distribution steel for either line of reinforcing in						
	the top slab shall be not more than 16 inches.						
Subsection:	615.06.07 Laps, Welds, and Spacing for Precast Endwalls.						
Revision:	Replace the subsection with the following:						
	Splices in the reinforcement shall be made by lapping. Laps may not be tack welded together						
	for assembly purposes. For smooth welded wire fabric, the overlap shall meet the requirements						
	of AASHTO 2012 Bridge Design Guide Section 5.11.2.5.2 and AASHTO 2012 Bridge Design						
	Guide Section 5.11.6.3. For deformed welded wire fabric, the overlap shall meet the						
	requirements of AASHTO 2012 Bridge Design Guide Section 5.11.2.5.1 and AASHTO 2012						
	Bridge Design Guide Section 5.11.6.2. For deformed billet-steel bars, the overlap shall meet the						
	requirements of AASHTO 2012 Bridge Design Guide Section 5.11.2.1. The spacing center-to-						
	center of the wire fabric sheet shall not be less than 2 inches or more than 8 inches.						
Subsection:	615.08.01 Type of Test Specimen.						
Revision:	Replace the subsection with the following:						
	Start-up slump, air content, unit weight, and temperature tests will be performed each day on the						
	first batch of concrete. Acceptable start-up results are required for production of the first unit.						
	After the first unit has been established, random acceptance testing is performed daily for each						
	50 yd ³ (or fraction thereof). In addition to the slump, air content, unit weight, and temperature						
	tests, a minimum of one set of cylinders shall be required each time plastic property testing is						
	performed.						
Subsection:	615.08.02 Compression Testing.						
Revision:	Delete the second sentence.						
Subsection:	615.08.04 Acceptability of Core Tests.						
	Delete the entire subsection.						

Contract ID: 142904 Page 27 of 48

Subsection:	615.12 Inspection.								
Revision:	Add the following sentences to the end of the subsection: Units will arrive at jobsite with the								
		Kentucky Oval" stamped on the unit which is an indication of acceptable inspection at the							
	-	action facility. Units shall be inspected upon arrival for any evidence of damage resulting							
	from transpo	ansport to the jobsite.							
Subsection:	716.02.02 Pa	int.							
Revision:	Replace sent	ence wi	th the foll	lowing: Con	nform to	Section 8	321.		
Subsection:	716.03 CON	STRUC	TION.						
Revision:	Replace bull	et 5) wit	th the foll	owing: 5)	AASHT	O Standa	rd Speci	fications	for Structural
	Supports for	ts for Highway Signs, Luminaires, and Traffic Signals, 2013-6th Edition with current					ion with current		
	interims,								
Subsection:	716.03.02 Li								
Revision:	Replace the s	second s	sentence v	with the fol	lowing:				
	_					_		_	guardrail a minimum
	of four feet f					the front	face of t	he pole b	ase.
Subsection:	716.03.02 Li			Installation.					
Part:	A) Convention								
Revision:	Replace the t				_		ansform	er base so	o the door is
	positioned or					c.			
Subsection:	716.03.02 Li			Installation.					
Part:	A) Convention								
Number:	1) Breakawa	-		_					
Revision:		eplace the first sentence with the following: For breakaway supports, conform to Section 12 of							
		ASHTO Standard Specifications for Structural Supports for Highway Signs, Luminaires,							
		d Traffic Signals, 2013-6th Edition with current interims.							
Subsection:	716.03.02 Li			nstallation.					
Part:	B) High Mas			.1 0.11	• т.	11 1 1		. 1	. 1 1
Revision:	•					all each h	ngh mas	t pole as	noted on plans.
Subsection:	716.03.02 Lighting Standard Installation.								
Part:	B) High Mast Installation								
Number:	2) Concrete Base Installation Modification of Chart and avacabling garage within this section.								
Revision:	Modification of Chart and succeeding paragraphs within this section:								
	Dril	Drilled Shaft Depth Data							
	3:1 Ground 2:1 Ground 1.5:1 Ground Level Ground Slope Slope Slope (2)								
	So		ck Sc		Soil	Rock	Soil	Rock	
	17		ft 19	ft 7 ft	20 ft	7 ft	(1)	7 ft	
	Ste	el Requi	rements						
		Vertical	Bars	Ties	or Spiral				
	Siz	ze	Total	Size	Spacii	_			
	#1	#10 16 #4 12 inch							
			10	#- T	1211				

Contract ID: 142904 Page 28 of 48

Supplemental Specifications to the Standard Specifications for Road and Bridge Construction, 2012 Edition Effective with the January 24, 2014 Letting

- (1): Shaft length is 22' for cohesive soil only. For cohesionless soil, contact geotechnical branch for design.
- (2): Do not construct high mast drilled shafts on ground slopes steeper than 1.5:1 without the approval of the Division of Traffic.

If rock is encountered during drilling operations and confirmed by the engineer to be of sound quality, the shaft is only required to be further advanced into the rock by the length of rock socket shown in the table. The total length of the shaft need not be longer than that of soil alone. Both longitudinal rebar length and number of ties or spiral length shall be adjusted accordingly.

If a shorter depth is desired for the drilled shaft, the contractor shall provide, for the state's review and approval, a detailed column design with individual site specific soil and rock analysis performed and approved by a Professional Engineer licensed in the Commonwealth of Kentucky.

Spiral reinforcement may be substituted for ties. If spiral reinforcement is used, one and one-half closed coils shall be provided at the ends of each spiral unit. Subsurface conditions consisting of very soft clay or very loose saturated sand could result in soil parameters weaker than those assumed. Engineer shall consult with the geotechnical branch if such conditions are encountered.

The bottom of the drilled hole shall be firm and thoroughly cleaned so no loose or compressible materials are present at the time of the concrete placement. If the drilled hole contains standing water, the concrete shall be placed using a tremie to displace water. Continuous concrete flow will be required to insure full displacement of any water.

The reinforcement and anchor bolts shall be adequately supported in the proper positions so no movement occurs during concrete placement. Welding of anchor bolts to the reinforcing cage is unacceptable, templates shall be used.

Exposed portions of the foundation shall be formed to create a smooth finished surface. All forming shall be removed upon completion of foundation construction.

Subsection:

716.03.03 Trenching.

Part:

A) Trenching of Conduit for Highmast Ducted Cables.

Revision:

Add the following after the first sentence: If depths greater than 24 inches are necessary, obtain the Engineer's approval and maintain the required conduit depths coming into the junction boxes. No payment for additional junction boxes for greater depths will be allowed.

Subsection:

716.03.03 Trenching.

Part:

B) Trenching of Conduit for Non-Highmast Cables.

Revision:

Add the following after the second sentence: If depths greater than 24 inches are necessary for either situation listed previously, obtain the Engineer's approval and maintain the required conduit depths coming into the junction boxes. No payment for additional junction boxes for greater depths will be allowed.

Subsection:

716.03.10 Junction Boxes.

Revision:

Replace subsection title with the following: Electrical Junction Box.

Contract ID: 142904 Page 29 of 48

Subsection:	716.04.07 Pole with Secondary Control Equipment.								
Revision:	Replace the paragraph with the following:								
ite vision.	The Department will measure the quantity as each individual unit furnished and installed. The								
	Department will not measure mounting the cabinet to the pole, backfilling, restoration, any								
	necessary hardware to anchor pole, or electrical inspection fees, and will consider them								
	incidental to this item of work. The Department will also not measure furnishing and installing								
	electrical service conductors, specified conduits, meter base, transformer, service panel, fused								
	cutout, fuses, lighting arrestors, photoelectrical control, circuit breaker, contactor, manual								
	switch, ground rods, and ground wires and will consider them incidental to this item of work.								
Subsection:	716.04.08 Lighting Control Equipment.								
Revision:	Replace the paragraph with the following:								
KCVISIOII.	The Department will measure the quantity as each individual unit furnished and installed. The								
	Department will not measure constructing the concrete base, excavation, backfilling, restoration,								
	any necessary anchors, or electrical inspection fees, and will consider them incidental to this								
	item of work. The Department will also not measure furnishing and installing electrical service								
	conductors, specified conduits, meter base, transformer, service panel, fused cutout, fuses,								
	lighting arrestors, photoelectrical control, circuit breakers, contactor, manual switch, ground								
	rods, and ground wires and will consider them incidental to this item of work.								
Subsection:	716.04.09 Luminaire.								
Revision:	Replace the first sentence with the following:								
110 (151011)	The Department will measure the quantity as each individual unit furnished and installed.								
Subsection:	716.04.10 Fused Connector Kits.								
Revision:	Replace the first sentence with the following:								
	The Department will measure the quantity as each individual unit furnished and installed.								
Subsection:	716.04.13 Junction Box.								
Revision:	Replace the subsection title with the following: Electrical Junction Box Type Various.								
Subsection:	716.04.13 Junction Box.								
Part:	A) Junction Electrical.								
Revision:	Rename A) Junction Electrical to the following: A) Electrical Junction Box.								
Subsection:	716.04.14 Trenching and Backfilling.								
Revision:	Replace the second sentence with the following:								
	The Department will not measure excavation, backfilling, underground utility warning tape (if								
	required), the restoration of disturbed areas to original condition, and will consider them								
	incidental to this item of work.								
Subsection:	716.04.18 Remove Lighting.								
Revision:	Replace the paragraph with the following:								
	The Department will measure the quantity as a lump sum for the removal of lighting equipment.								
	The Department will not measure the disposal of all equipment and materials off the project by								
	the contractor. The Department also will not measure the transportation of the materials and								
	will consider them incidental to this item of work.								

Subsection:	716.04.20 Bore and Jack Conduit.							
Revision:	Replace the paragraph with the following: The Department will measure the quantity in linear							
ic vision.	feet. This item shall include all work necessary for boring and installing conduit under an							
	existing roadway. Construction methods shall be in accordance with Sections 706.03.02,							
	paragraphs 1, 2, and 4.							
Subsection:	716.05 PAYMENT.							
Revision:	Replace items 04810-04811, 20391NS835 and, 20392NS835 under <u>Code</u> , <u>Pay Item</u> , and <u>Pay</u>							
ite vision.	Unit with the following:							
	Code Pay Item Pay Unit							
	04810 Electrical Junction Box Each							
	04811 Electrical Junction Box Type B Each							
	20391NS835 Electrical Junction Box Type A Each							
	20392NS835 Electrical Junction Box Type C Each							
Subsection:	723.03 CONSTRUCTION.							
Revision:	Replace bullet 5) with the following: 5) AASHTO Standard Specifications for Structural							
	Supports for Highway Signs, Luminaires, and Traffic Signals, 2013-6th Edition with current							
	interims,							
Subsection:	723.02.02 Paint.							
Revision:	Replace sentence with the following: Conform to Section 821.							
Subsection:	723.03.02 Poles and Bases Installation.							
Revision:	Replace the first sentence with the following:							
	Regardless of the station and offset noted, locate all poles/bases behind the guardrail a minimum							
	of four feet from the front face of the guardrail to the front face of the pole base.							
Subsection:	723.03.02 Poles and Bases Installation.							
Part:	A) Steel Strain and Mastarm Poles Installation							
Revision:	Replace the second paragraph with the following: For concrete base installation, see Section							
	716.03.02, B), 2), Paragraphs 2-7. Drilled shaft depth shall be based on the soil conditions							
	encountered during drilling and slope condition at the site. Refer to the design chart below:							
Subsection:	723.03.02 Poles and Bases Installation.							
Part:	B) Pedestal or Pedestal Post Installation.							
Revision:	Replace the fourth sentence of the paragraph with the following: For breakaway supports,							
	conform to Section 12 of the AASHTO Standard Specifications for Structural Supports for							
	Highway Signs, Luminaires, and Traffic Signals, 2013-6th Edition with current interims.							
Subsection:	723.03.03 Trenching.							
Part:	A) Under Roadway.							
Revision:	Add the following after the second sentence: If depths greater than 24 inches are necessary,							
	obtain the Engineer's approval and maintain ether required conduit depths coming into the							
	junction boxes. No payment for additional junction boxes for greater depths will be allowed.							
Subsection:	723.03.11 Wiring Installation.							
Revision:	Add the following sentence between the fifth and sixth sentences: Provide an extra two feet of							
	loop wire and lead-in past the installed conduit in poles, pedestals, and junction boxes.							
	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1							

OLDHAM COUNTY CB06 093 1694 B00025N

Subsection:	723.03.12 Loop Installation.
Revision:	Replace the fifth sentence with the following: Provide an extra two feet of loop wire and lead-in
	past the installed conduit in poles, pedestals, and junction boxes.
Subsection:	723.04.02 Junction Box.
Revision:	Replace subsection title with the following: Electrical Junction Box Type.
Subsection:	723.04.03 Trenching and Backfilling.
Revision:	Replace the second sentence with the following: The Department will not measure excavation,
	backfilling, underground utility warning tape (if required), the restoration of disturbed areas to
	original condition, and will consider them incidental to this item of work.
Subsection:	723.04.10 Signal Pedestal.
Revision:	Replace the second sentence with the following: The Department will not measure excavation,
	concrete, reinforcing steel, specified conduits, fittings, ground rod, ground wire, backfilling,
	restoring disturbed areas, or other necessary hardware and will consider them incidental to this
	item of work.
Subsection:	723.04.15 Loop Saw Slot and Fill.
Revision:	Replace the second sentence with the following: The Department will not measure sawing,
	cleaning and filling induction loop saw slot, loop sealant, backer rod, and grout and will
	consider them incidental to this item of work.
Subsection:	723.04.16 Pedestrian Detector.
Revision:	Replace the paragraph with the following: The Department will measure the quantity as each
	individual unit furnished, installed and connected to pole/pedestal. The Department will not
	measure installing R10-3e (with arrow) sign, furnishing and installing mounting hardware for
	sign and will consider them incidental to this item of work.
Subsection:	723.04.18 Signal Controller- Type 170.
Revision:	Replace the second sentence with the following: The Department will not measure constructing
	the concrete base or mounting the cabinet to the pole, connecting the signal and detectors,
	excavation, backfilling, restoration, any necessary pole mounting hardware, electric service, or
	electrical inspection fees and will consider them incidental to this item of work. The
	Department will also not measure furnishing and connecting the induction of loop amplifiers,
	pedestrian isolators, load switches, model 400 modem card; furnishing and installing electrical
	service conductors, specified conduits, anchors, meter base, fused cutout, fuses, ground rods,
G 1	ground wires and will consider them incidental to this item of work.
Subsection:	723.04.20 Install Signal Controller - Type 170.
Revision:	Replace the paragraph with the following: The Department will measure the quantity as each
	individual unit installed. The Department will not measure constructing the concrete base or
	mounting the cabinet to the pole, connecting the signal and detectors, and excavation, backfilling, restoration, any necessary pole mounting hardware, electric service, or electrical
	inspection fees and will consider them incidental to this item of work. The Department will also
	not measure connecting the induction loop amplifiers, pedestrian, isolators, load switches,
	model 400 modem card; furnishing and installing electrical service conductors, specified
	conduits, anchors, meter base, fused cutout, fuses, ground rods, ground wires and will consider
	them incidental to this item of work.
	mem mercental to this item of work.

Subsection:	723.04.22 Remove Signal Equipment.		
Revision:	Replace the paragraph with the following: The Department will measure the quantity as a lum		
	sum removal of signal equipment. The Department will not measure the return of control		
	equipment and signal heads to the Department of Highways as directed by the District Traffic		
	Engineer. The Department also will not measure the transportation of materials of the disposal		
	of all other equipment and materials off the project by the contractor and will consider them		
	incidental to this item of work.		
Subsection:	723.04.28 Install Pedestrian Detector Audible.		
Revision:	Replace the second sentence with the following: The Department will not measure installing		
	sign R10-3e (with arrow) and will consider it incidental to this item of work.		
Subsection:	723.04.29 Audible Pedestrian Detector.		
Revision:	Replace the second sentence with the following: The Department will not measure furnishing		
	and installing the sign R10-3e (with arrow) and will consider it incidental to this item of work.		
Subsection:	723.04.30 Bore and Jack Conduit.		
Revision:	Replace the paragraph with the following: The Department will measure the quantity in linear		
	feet. This item shall include all work necessary for boring and installing conduit under an		
	existing roadway. Construction methods shall be in accordance with Sections 706.03.02,		
	paragraphs 1, 2, and 4.		
Subsection:	723.04.31 Install Pedestrian Detector.		
Revision:	Replace the paragraph with the following: The Department will measure the quantity as each		
	individual unit installed and connected to pole/pedestal. The Department will not measure		
	installing sign R 10-3e (with arrow) and will consider it incidental to this item of work.		
Subsection:	723.04.32 Install Mast Arm Pole.		
Revision:	Replace the second sentence with the following: The Department will not measure arms, signal		
	mounting brackets, anchor bolts, or any other necessary hardware and will consider them		
	incidental to this item of work.		
Subsection:	723.04.33 Pedestal Post.		
Revision:	Replace the second sentence with the following: The Department will not measure excavation,		
	concrete, reinforcing steel, anchor bolts, conduit, fittings, ground rod, ground wire, backfilling,		
	restoration, or any other necessary hardware and will consider them incidental to this item of		
	work.		
Subsection:	723.04.36 Traffic Signal Pole Base.		
Revision:	Replace the second sentence with the following: The Department will not measure excavation,		
	reinforcing steel, anchor bolts, specified conduits, ground rods, ground wires, backfilling, or		
	restoration and will consider them incidental to this item of work.		
Subsection:	723.04.37 Install Signal Pedestal.		
Revision:	Replace the second sentence with the following: The Department will not measure excavation,		
	concrete, reinforcing steel, anchor bolts, specified conduits, fittings, ground rod, ground wire,		
	backfilling, restoration, or any other necessary hardware and will consider them incidental to		
	this item of work.		

Contract ID: 142904 Page 33 of 48

Subsection:	723.04.38 Install Pedestal Post.				
Revision:	Replace the second sentence with the following: The Department will not measure excavation,				
	concrete, reinforcing steel, anchor bolts, specified conduits, fittings, ground rod, ground wire,				
	backfilling, restoration, or any other necessary hardware and will consider them incidental to				
	this item of work.				
Subsection:	723.05 PAYMENT.				
Revision:	Replace items 04810-04811, 20391NS835 and, 20392NS835 under Code, Pay Item, and Pay				
110 (151011)	Unit with the following:				
	with the following.				
	Code	Pay Item Pay Unit			
	04810	Electrical Junction Box Each			
	04811	Electrical Junction Box Type B Each			
	20391NS835	Electrical Junction Box Type A Each			
	20392NS835	Electrical Junction Box Type C Each			
Subsection:	813.04 Gray Iron	Castings.			
Revision:	Replace the reference to "AASHTO M105" with "ASTM A48".				
Subsection:	813.09.02 High Strength Steel Bolts, Nuts, and Washers.				
Number:	A) Bolts.				
Revision:	Delete first paragraph and "Hardness Number" Table. Replace with the following:				
	A) Bolts. Conform to ASTM A325 (AASHTO M164) or ASTM A490 (AASHTO 253) as applicable.				
Subsection:	814.04.02 Timber Guardrail Posts.				
Revision:	Third paragraph, replace the reference to "AWPA C14" with "AWPA U1, Section B, Paragraph, replace the reference to "AWPA C14" with "AWPA U1, Section B, Paragraph, replace the reference to "AWPA C14" with "AWPA U1, Section B, Paragraph, replace the reference to "AWPA C14" with "AWPA U1, Section B, Paragraph, replace the reference to "AWPA C14" with "AWPA U1, Section B, Paragraph, replace the reference to "AWPA C14" with "AWPA U1, Section B, Paragraph, replace the reference to "AWPA C14" with "AWPA U1, Section B, Paragraph, replace the reference to "AWPA C14" with "AWPA U1, Section B, Paragraph, replace the reference to "AWPA C14" with "AWPA U1, Section B, Paragraph, replace the reference to "AWPA C14" with "AWPA U1, Section B, Paragraph, replace the reference to "AWPA C14" with "AWPA U1, Section B, Paragraph, replace the reference to "AWPA C14" with "AWPA U1, Section B, Paragraph, replace the reference to "AWPA C14" with "AWPA U1, Section B, Paragraph, replace the reference to "AWPA C14" with "AWPA U1, Section B, Paragraph, replace the reference to "AWPA C14" with "AWPA U1, Section B, Paragraph, replace the reference to "AWPA C14" with "AWPA U1, Section B, Paragraph, replace the reference to "AWPA C14" with "AWPA U1, Section B, Paragraph, replace the reference to "AWPA C14" with "AWPA U1, Section B, Paragraph, replace the reference to "AWPA C14" with "AWPA U1, Section B, Paragraph, replace the reference to "AWPA C14" with "AWPA U1, Section B, Paragraph, replace the reference to "AWPA C14" with "AWPA U1, Section B, Paragraph, replace the reference to "AWPA C14" with "AWPA U1, Section B, Paragraph, replace the reference to "AWPA C14" with "AWPA C14" wit				
	4.1".				
Subsection:	814.04.02 Timber Guardrail Posts.				
Revision:	Replace the first sentence of the fourth paragraph with the following:				
	Use any of the species of wood for round or square posts covered under AWPA U1.				
Subsection:	814.04.02 Timbe	er Guardrail Posts.			
Revision:	Fourth paragraph, replace the reference to "AWPA C2" with "AWPA U1, Section B, Paragraph,				
	4.1".				
Subsection:		er Guardrail Posts.			
Revision:	Delete the second	d sentence of the fourth paragraph.			
Cubaastian	916 07 02 Wood	Posts and Braces.			
Subsection:					
Revision:	First paragraph, 1 4.1".	replace the reference to "AWPA C5" with "AWPA U1, Section B, Paragraph			
Subsection:		Posts and Braces.			
Revision:		d sentence of the first paragraph.			
Subsection:	818.07 Preservat	· • ·			
Revision:		replace all references to "AWPA C14" with "AWPA U1, Section A".			
17C 1191011.	masi paragrapii, i	epiace an references to AWIACI4 WILLI AWIA UI, SECTIONA.			

a	OOA AAAAGUEDAG DOA EG			
Subsection:	834.14 LIGHTING POLES.			
Revision:	Replace the first sentence with the following: Lighting pole design shall be in accordance with			
	loading and allowable stress requirements of the AASHTO Standard Specifications for			
	Structural Supports for Highway Signs, Luminaires, and Traffic Signals, 2013-6th Edition with			
	current interims.			
Subsection:	834.14.03 High Mast Poles.			
Revision:	*Remove the second and fourth sentence from the first paragraph.			
	*Replace the third paragraph with the following: Provide calculations and drawings that are			
	stamped by a Professional Engineer licensed in the Commonwealth of Kentucky.			
	*Replace paragraph six with the following: Provide a pole section that conforms to ASTM A			
	595 grade A with a minimum yield strength of 55 KSI or ASTM A 572 with a minimum yield			
	strength of 55 KSI. Use tubes that are round or 16 sided with a four inch corner radius, have a			
	constant linear taper of .144 in/ft and contain only one longitudinal seam weld. Circumferential			
	welded tube butt splices and laminated tubes are not permitted. Provide pole sections that are			
	telescopically slip fit assembled in the field to facilitate inspection of interior surface welds and			
	the protective coating. The minimum length of the telescopic slip splices shall be 1.5 times the			
	inside diameter of the exposed end of the female section. Use longitudinal seam welds as			
	commended in Section 5.15 of the AASHTO 2013 Specifications. The thickness of the			
	opening of the handhole shall not be less than the diameter of the bottom tube of the pole but			
	needs to be at least 15 inches. The handhole frame width shall be 0.4 times the diameter of the			
	bottom tube. Provide			
	products that are hot-dip galvanized to the requirements of either ASTM A123 (fabricated			
	products) or ASTM A 153 (hardware items).			
Subsection:	834.16 ANCHOR BOLTS.			
Revision:	Insert the following sentence at the beginning of the paragraph: The anchor bolt design shall			
Ke vision.	follow the NCHRP Report 494 Section 2.4 and NCHRP 469 Appendix A Specifications.			
Subsection:	834.17.01 Conventional.			
Revision:	Add the following sentence after the second sentence: Provide a waterproof sticker mounted on			
Ke vision.	the bottom of the housing that is legible from the ground and indicates the wattage of the fixture			
	by providing the fist to numbers of the wattage.			
Subsection:	834.21.01 Waterproof Enclosures.			
Revision:	*Add the following sentence in the second paragraph in the thirteenth sentence: Provide a			
ACVISIUII.	cabinet door with a louvered air vent, Filter-retaining brackets and an easy clean metal filter.			
	*Replace sentence sixteen with the following: Use a 120-volt fixture and utilize a compact			
	fluorescent or L.E.D. bulb (equivalent to 60 watt minimum).			
Subsection:	835.07 Traffic Poles.			
Revision:	Replace the first sentence of the first paragraph with the following: Pole diameter and wall			
	thickness shall be calculated in accordance with the AASHTO Standard Specifications for			
	Structural Supports for Highway Signs, Luminaires, and Traffic Signals, 2013-6th Edition with			
	current interims.			

Subsection:	835.07 Traffic Poles.		
Revision:	*Replace the first sentence of the fourth paragraph with the following: Ensure transverse plats		
	have a thickness ≥ 2 inches.		
	*Add the following sentence to the end of the fourth paragraph: The bottom pole diameter shall		
	not be less than 16.25 inches.		
Subsection:	835.07 Traffic Poles.		
Revision:	Replace the second sentence of the fifth paragraph with the following: For anchor bolt design		
	pole forces shall be positioned in such a manner to maximize the force on any individual anchor		
	bolt regardless of the actual anchor bolt orientation with the pole.		
Subsection:	835.07 Traffic Poles.		
Revision:	Replace the first and second sentence of the sixth paragraph with the following: The		
	pole handhole shall be 25 inches by 6.5 inches. The handhole cover shall be removable from the		
	handhole frame. On the frame side opposite the hinge, provide a mechanism on the handhole		
	cover/frame to place the Department's standard padlock as specified in Section 834.25. The		
	handhole frame shall have two stainless studs installed opposite the hinge to secure the handhole		
	cover to the frame which includes providing stainless steel wing nuts and washers. The		
	handhole cover shall be manufactured from 0.25 inch thick galvanized steel (ASTM 153) and		
	have a neoprene rubber gasket that is permanently secured to the handhole frame to insure		
	weather-tight protection. The hinge shall be manufactured from 7 gauge stainless steel to		
	provide adjustability to insure a weather-tight fit for the cover. The minimum clear distance		
	between the transverse plate and the bottom opening of the handhole shall not be less than the		
	diameter of the bottom tube but needs to be at least 12 inches.		
Subsection:	835.07 Traffic Poles.		
Revision:	*Replace the first sentence of the last paragraph with the following: Provide calculations and		
	drawings that are stamped by a Professional Engineer licensed in the Commonwealth of		
	Kentucky.		
	*Replace the third sentence of the last paragraph with the following: All tables referenced in		
	835.07 are found in the AASHTO Standard Specifications for Structural Supports for Highway		
	Signs, Luminaires, and Traffic Signals, 2013-6th Edition with current interims.		
Subsection:	835.07.01 Steel Strain Poles.		
Revision:	Replace the second sentence of the second paragraph with the following:		
	The detailed analysis shall be certified by a Professional Engineer licensed in the		
	Commonwealth of Kentucky.		
Subsection:	835.07.01 Steel Strain Poles.		
Revision:	Replace number 7. after the second paragraph with the following: 7. Fatigue calculations should		
	be shown for all fatigue related connections. Provide the corresponding detail, stress category		
	and example from table 11.9.3.1-1.		
Subsection:	835.07.02 Mast Arm Poles.		
Revision:	Replace the second sentence of the fourth paragraph with the following: The detailed analysis		
	shall be certified by a Professional Engineer licensed in the Commonwealth of Kentucky.		

Contract ID: 142904 Page 36 of 48

Subsection:	835.07.02 Mast Arm Poles.		
Revision:	Replace number 7) after the fourth paragraph with the following: 7) Fatigue calculations should		
	be shown for all fatigue related connections. Provide the corresponding detail, stress category		
	and example from table 11.9.3.1-1.		
Subsection:	835.07.03 ANCHORS.		
Revision:	Add the following to the end of the paragraph: There shall be two steel templates (one can be		
	used for the headed part of the anchor bolt when designed in this manner) provided per pole.		
	Templates shall be contained within a 26.5 inch diameter. All templates shall be fully		
	galvanized (ASTM A 153).		
Subsection:	835.16.05 Optical Units.		
Revision:	Replace the 3rd paragraph with the following:		
	The list of certified products can be found on the following website: http://www.intertek.com.		
Subsection:	835.19.01 Pedestrian Detector Body.		
Revision:	Replace the first sentence with the following: Provide a four holed pole mounted aluminum		
	rectangular housing that is a compatible with the pedestrian detector.		

STANDARD DRAWINGS THAT APPLY

ROADWAY ~ BARRIERS ~

CONCRETE MEDIAN BARRIERS

DELINEATORS FOR CONCRETE BARRIERS (Payment Incidental to Barrier Wall 91)	RBM-020-08
CONCRETE BARRIER WALL 9T	RBM-115-08
CRASH CUSHION IX-T	RBE-100-09

TRAFFIC ~ TEMPORARY ~

TRAFFIC CONTROL

LANE CLOSURE TWO-LANE HIGHWAY CASE I	TTC-100
LANE CLOSURE TWO-LANE HIGHWAY CASE II	TTC-105
LANE CLOSURE USING TRAFFIC SIGNALS	TTC-110
LANE CLOSURE MULTI-LANE HIGHWAY CASE I	TTC-115
LANE CLOSURE MULTI-LANE HIGHWAY CASE II	TTC-120

DEVICES

POST SPLICING DETAIL	TTD-110
WORK ZONE SPEED LIMIT AND DOUBLE FINE SIGNS	TTD-120
PAVEMENT CONDITION WARNING SIGNS	TTD-125

BRIDGES

MISCELLANEOUS STANDARDS

BRIDGE RESTORATION AND WATERPROOFING WITH CONCRETE OVERLAYS BGX-009-04

JOINTS

NEOPRENE EXPANSION DAMS AND ARMORED EDGES BJE-001-11

PART III

EMPLOYMENT, WAGE AND RECORD REQUIREMENTS

OLDHAM COUNTY CB06 093 1694 B00025N

Contract ID: 142904 Page 39 of 48

TRANSPORTATION CABINET DEPARTMENT OF HIGHWAYS

LABOR AND WAGE REQUIREMENTS APPLICABLE TO OTHER THAN FEDERAL-AID SYSTEM PROJECTS

I. Application

II. Nondiscrimination of Employees (KRS 344)

III. Payment of Predetermined Minimum Wages

IV. Statements and Payrolls

I. APPLICATION

1. These contract provisions shall apply to all work performed on the contract by the contractor with his own organization and with the assistance of workmen under his immediate superintendence and to all work performed on the contract by piecework, station work or by subcontract. The contractor's organization shall be construed to include only workmen employed and paid directly by the contractor and equipment owned or rented by him, with or without operators.

2. The contractor shall insert in each of his subcontracts all of the stipulations contained in these Required Provisions and such other stipulations as may be required.

3. A breach of any of the stipulations contained in these Required Provisions may be grounds for termination of the contract.

II. NONDISCRIMINATION OF EMPLOYEES

AN ACT OF THE KENTUCKY GENERAL ASSEMBLY TO PREVENT DISCRIMINATION IN EMPLOYMENT KRS CHAPTER 344 EFFECTIVE JUNE 16, 1972

The contract on this project, in accordance with KRS Chapter 344, provides that during the performance of this contract, the contractor agrees as follows:

1. The contractor shall not fail or refuse to hire, or shall not discharge any individual, or otherwise discriminate against an individual with respect to his compensation, terms, conditions, or privileges of employment, because of such individual's race, color, religion, national origin, sex, disability or age (between forty and seventy); or limit, segregate, or classify his employees in any way which would deprive or tend to deprive an individual of employment opportunities or otherwise adversely affect his status as an employee, because of such individual's race, color, religion, national origin, sex, disability or age (between forty and seventy). The contractor agrees to post in conspicuous places, available to employees and applicants for employment, notices to be provided setting forth the provisions of this nondiscrimination clause.

2. The contractor shall not print or publish or cause to be printed or published a notice or advertisement relating to employment by such an employer or membership in or any classification or referral for employment by the employment agency, indicating any preference, limitation, specification, or discrimination, based on race, color, religion, national origin, sex, disability or age (between forty and seventy), except that such notice or advertisement may indicate a preference, limitation, or specification based on religion, or national origin when religion, or national origin is a bona fide occupational qualification for employment.

3. If the contractor is in control of apprenticeship or other training or retraining, including on-the-job training programs, he shall not discriminate against an individual

because of his race, color, religion, national origin, sex, disability or age (between forty and seventy), in admission to, or employment in any program established to provide apprenticeship or other training.

4. The contractor will send to each labor union or representative of workers with which he has a collective bargaining agreement or other contract or understanding, a notice to be provided advising the said labor union or workers' representative of the contractor's commitments under this section, and shall post copies of the notice in conspicuous places available to employees and applicants for employment. The contractor will take such action with respect to any subcontract or purchase order as the administrating agency may direct as a means of enforcing such provisions, including sanctions for non-compliance.

III. PAYMENT OF PREDETERMINED MINIMUM WAGES

- 1. These special provisions are supplemented elsewhere in the contract by special provisions which set forth certain predetermined minimum wage rates. The contractor shall pay not less than those rates.
- 2. The minimum wage determination schedule shall be posted by the contractor, in a manner prescribed by the Department of Highways, at the site of the work in prominent places where it can be easily seen by the workers.

IV. STATEMENTS AND PAYROLLS

- 1. All contractors and subcontractors affected by the terms of KRS 337.505 to 337.550 shall keep full and accurate payroll records covering all disbursements of wages to their employees to whom they are required to pay not less than the prevailing rate of wages. Payrolls and basic records relating thereto will be maintained during the course of the work and preserved for a period of one (1) year from the date of completion of this contract.
- 2. The payroll records shall contain the name, address and social security number of each employee, his correct classification, rate of pay, daily and weekly number of hours worked, itemized deductions made and actual wages paid.
- 3. The contractor shall make his daily records available at the project site for inspection by the State Department of Highways contracting office or his authorized representative.

Periodic investigations shall be conducted as required to assure compliance with the labor provisions of the contract. Interrogation of employees and officials of the contractor shall be permitted during working hours.

Aggrieved workers, Highway Managers, Assistant District Engineers, Resident Engineers and Project Engineers shall report all complaints and violations to the Division of Contract Procurement.

The contractor shall be notified in writing of apparent violations. The contractor may correct the reported violations and notify the Department of Highways of the action taken or may request an informal hearing. The request for hearing shall be in writing within ten (10) days after receipt of the notice of the reported violation. The contractor may submit

records and information which will aid in determining the true facts relating to the reported violations.

Any person or organization aggrieved by the action taken or the findings established as a result of an informal hearing by the Division of Contract Procurement may request a formal hearing.

- 4. The wages of labor shall be paid in legal tender of the United States, except that this condition will be considered satisfied if payment is made by a negotiable check, on a solvent bank, which may be cashed readily by the employee in the local community for the full amount, without discount or collection charges of any kind. Where checks are used for payments, the contractor shall make all necessary arrangements for them to be cashed and shall give information regarding such arrangements.
- 5. No fee of any kind shall be asked or accepted by the contractor or any of his agents from any person as a condition of employment on the project.
- 6. No laborers shall be charged for any tools used in performing their respective duties except for reasonably avoidable loss or damage thereto.
- 7. Every employee on the work covered by this contract shall be permitted to lodge, board, and trade where and with whom he elects and neither the contractor nor his agents, nor his employees shall directly or indirectly require as a condition of employment that an employee shall lodge, board or trade at a particular place or with a particular person.
- 8. Every employee on the project covered by this contract shall be an employee of either the prime contractor or an approved subcontractor.
- 9. No charge shall be made for any transportation furnished by the contractor or his agents to any person employed on the work.
- 10. No individual shall be employed as a laborer or mechanic on this contract except on a wage basis, but this shall not be construed to prohibit the rental of teams, trucks or other equipment from individuals.

No Covered employee may be employed on the work except in accordance with the classification set forth in the schedule mentioned above; provided, however, that in the event additional classifications are required, application shall be made by the contractor to the Department of Highways and (1) the Department shall request appropriate classifications and rates from the proper agency, or (2) if there is urgent need for additional classification to avoid undue delay in the work, the contractor may employ such workmen at rates deemed comparable to rates established for similar classifications provided he has made written application through the Department of Highways, addressed to the proper agency, for the supplemental rates. The contractor shall retroactively adjust, upon receipt of the supplemental rates schedule, the wages of any employee paid less than the established rate and may adjust the wages of any employee overpaid.

- 11. No contractor or subcontractor contracting for any part of the contract work which may require or involve the employment of laborers or mechanics shall require or permit any laborer or mechanic in any work-week in which he is employed on such work, to work in excess of eight hours in any calendar day or in excess of forty hours in such workweek unless such laborer or mechanic receives compensation at a rate not less than one and one half times his basic rate of pay for all hours worked in excess of eight hours in any calendar day or in excess of forty hours in such work-week. A laborer, workman or mechanic and an employer may enter into a written agreement or a collective bargaining agreement to work more than eight (8) hours a calendar day but not more than ten (10) hours a calendar day for the straight time hourly rate. This agreement shall be in writing and shall be executed prior to the employee working in excess of eight (8) hours, but not more than ten (10) hours, in any one (1) calendar day.
- 12. Payments to the contractor may be suspended or withheld due to failure of the contractor to pay any laborer or

mechanic employed or working on the site of the work, all or part of the wages required under the terms of the contract. The Department may suspend or withhold payments only after the contractor has been given written notice of the alleged violation and the contractor has failed to comply with the wage determination of the Department of Highways.

13. Contractors and subcontractors shall comply with the sections of Kentucky Revised Statutes, Chapter 337 relating to contracts for Public Works.

Revised 2-16-95

EXECUTIVE BRANCH CODE OF ETHICS

In the 1992 regular legislative session, the General Assembly passed and Governor Brereton Jones signed Senate Bill 63 (codified as KRS 11A), the Executive Branch Code of Ethics, which states, in part:

KRS 11A.040 (6) provides:

No present or former public servant shall, within six (6) months of following termination of his office or employment, accept employment, compensation or other economic benefit from any person or business that contracts or does business with the state in matters in which he was directly involved during his tenure. This provision shall not prohibit an individual from returning to the same business, firm, occupation, or profession in which he was involved prior to taking office or beginning his term of employment, provided that, for a period of six (6) months, he personally refrains from working on any matter in which he was directly involved in state government. This subsection shall not prohibit the performance of ministerial functions, including, but not limited to, filing tax returns, filing applications for permits or licenses, or filing incorporation papers.

KRS 11A.040 (8) states:

A former public servant shall not represent a person in a matter before a state agency in which the former public servant was directly involved, for a period of one (1) year after the latter of:

- a) The date of leaving office or termination of employment; or
- b) The date the term of office expires to which the public servant was elected.

This law is intended to promote public confidence in the integrity of state government and to declare as public policy the idea that state employees should view their work as a public trust and not as a way to obtain private benefits.

If you have worked for the executive branch of state government within the past six months, you may be subject to the law's prohibitions. The law's applicability may be different if you hold elected office or are contemplating representation of another before a state agency.

Also, if you are affiliated with a firm which does business with the state and which employs former state executive-branch employees, you should be aware that the law may apply to them.

In case of doubt, the law permits you to request an advisory opinion from the Executive Branch Ethics Commission, Room 136, Capitol Building, 700 Capitol Avenue, Frankfort, Kentucky 40601; telephone (502) 564-7954.

Kentucky Equal Employment Opportunity Act of 1978

The requirements of the Kentucky Equal Employment Opportunity Act of 1978 (KRS 45.560-45.640) shall not apply to this Contract.

Contract ID: 142904 Page 43 of 48

TRANSPORTATION CABINET DIVISION OF CONSTRUCTION PROCUREMENT COMPLIANCE SECTION PROJECT WAGE RATES

WORKERS	MINIMUM HOURLY
RATE\$7.2	5

Note: Parts III and IV of "Labor and Wage Requirements Applicable to Other Than Federal-Aid System Projects" do not apply to this project.

Federal-State Sheet 1 of 1

EMPLOYEE RIGHTS UNDER THE FAIR LABOR STANDARDS ACT

THE UNITED STATES DEPARTMENT OF LABOR WAGE AND HOUR DIVISION

FEDERAL MINIMUM WAGE

\$7.25

PER HOUR

BEGINNING JULY 24, 2009

OVERTIME PAY

At least $1\frac{1}{2}$ times your regular rate of pay for all hours worked over 40 in a workweek.

CHILD LABOR

OLDHAM COUNTY CB06 093 1694 B00025N An employee must be at least **16** years old to work in most non-farm jobs and at least **18** to work in non-farm jobs declared hazardous by the Secretary of Labor.

Youths **14** and **15** years old may work outside school hours in various non-manufacturing, non-mining, non-hazardous jobs under the following conditions:

Contract ID: 142904 Page 44 of 48

No more than

- 3 hours on a school day or 18 hours in a school week;
- 8 hours on a non-school day or 40 hours in a non-school week.

Also, work may not begin before **7 a.m.** or end after **7 p.m.**, except from June 1 through Labor Day, when evening hours are extended to **9 p.m.** Different rules apply in agricultural employment.

TIP CREDIT

Employers of "tipped employees" must pay a cash wage of at least \$2.13 per hour if they claim a tip credit against their minimum wage obligation. If an employee's tips combined with the employer's cash wage of at least \$2.13 per hour do not equal the minimum hourly wage, the employer must make up the difference. Certain other conditions must also be met.

ENFORCEMENT

The Department of Labor may recover back wages either administratively or through court action, for the employees that have been underpaid in violation of the law. Violations may result in civil or criminal action.

Employers may be assessed civil money penalties of up to \$1,100 for each willful or repeated violation of the minimum wage or overtime pay provisions of the law and up to \$11,000 for each employee who is the subject of a violation of the Act's child labor provisions. In addition, a civil money penalty of up to \$50,000 may be assessed for each child labor violation that causes the death or serious injury of any minor employee, and such assessments may be doubled, up to \$100,000, when the violations are determined to be willful or repeated. The law also prohibits discriminating against or discharging workers who file a complaint or participate in any proceeding under the Act.

ADDITIONAL INFORMATION

- Certain occupations and establishments are exempt from the minimum wage and/or overtime pay provisions.
- Special provisions apply to workers in American Samoa and the Commonwealth of the Northern Mariana Islands.
- Some state laws provide greater employee protections; employers must comply with both.
- The law requires employers to display this poster where employees can readily see it.
- Employees under 20 years of age may be paid \$4.25 per hour during their first 90 consecutive calendar days of employment with an employer.
- Certain full-time students, student learners, apprentices, and workers with disabilities may be paid less than the minimum wage under special certificates issued by the Department of Labor.



PART IV

INSURANCE

Contract ID: 142904 Page 46 of 48

INSURANCE

The Contractor shall procure and maintain the following insurance in addition to the insurance required by law:

- 1) Commercial General Liability-Occurrence form not less than \$2,000,000 General aggregate, \$2,000,000 Products & Completed Aggregate, \$1,000,000 Personal & Advertising, \$1,000,000 each occurrence.
- 2) Automobile Liability- \$1,000,000 per accident
- 3) Employers Liability:
 - a) \$100,000 Each Accident Bodily Injury
 - b) \$500,000 Policy limit Bodily Injury by Disease
 - c) \$100,000 Each Employee Bodily Injury by Disease
- 4) The insurance required above must be evidenced by a Certificate of Insurance and this Certificate of Insurance must contain one of the following statements:
 - a) "policy contains no deductible clauses."
 - b) "policy contains _____ (amount) deductible property damage clause but company will pay claim and collect the deductible from the insured."
- 5) KENTUCKY WORKMEN'S COMPENSATION INSURANCE. The contractor shall furnish evidence of coverage of all his employees or give evidence of self-insurance by submitting a copy of a certificate issued by the Workmen's Compensation Board.

The cost of insurance is incidental to all contract items. All subcontractors must meet the same minimum insurance requirements.

PART V

BID ITEMS

Contract ID: 142904 Page 48 of 48

142904

PROPOSAL BID ITEMS

Page 1 of 1

Report Date 3/6/14

Section: 0001 - PAVING

LINE	BID CODE	ALT	DESCRIPTION	QUANTITY	UNIT	UNIT PRICEFP	AMOUNT
0010	00190		LEVELING & WEDGING PG64-22	6.00	TON	\$	
0020	00301		CL2 ASPH SURF 0.38D PG64-22	149.00	TON	\$	
0030	02562		TEMPORARY SIGNS	150.00	SQFT	\$	
0040	02650		MAINTAIN & CONTROL TRAFFICAPPLIES TO 093B00025N	1.00	LS	\$	
0050	02676		MOBILIZATION FOR MILL & TEXT(KY 1694)	1.00	LS	\$	
0060	02677		ASPHALT PAVE MILLING & TEXTURING	34.00	TON	\$	
0070	03250		ONE STEP MEMBRANE	704.00	SQYD	\$	
0800	06510		PAVE STRIPING-TEMP PAINT-4 IN	2,072.00	LF	\$	
0090	06514		PAVE STRIPING-PERM PAINT-4 IN	1,036.00	LF	\$	
0100	08549		BLAST CLEANING	613.00	SQYD	\$	
0110	10020NS		FUEL ADJUSTMENT	258.00	DOLL	\$1.00 \$	\$258.0
0120	10030NS		ASPHALT ADJUSTMENT	455.00	DOLL	\$1.00 \$	\$455.0

Section: 0002 - DEMOBILIZATION

LINE	BID CODE	ALT DESCRIPTION	QUANTITY	UNIT	UNIT PRICEFP AMOUNT	
0130	02569	DEMOBILIZATION	1.00	LS	\$	